



1/11

**FIG.1**

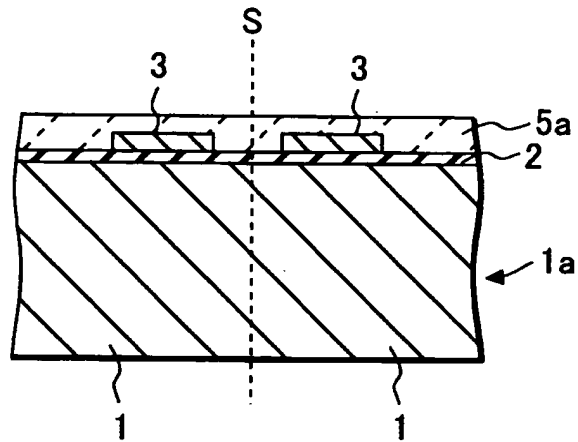


**FIG.2**

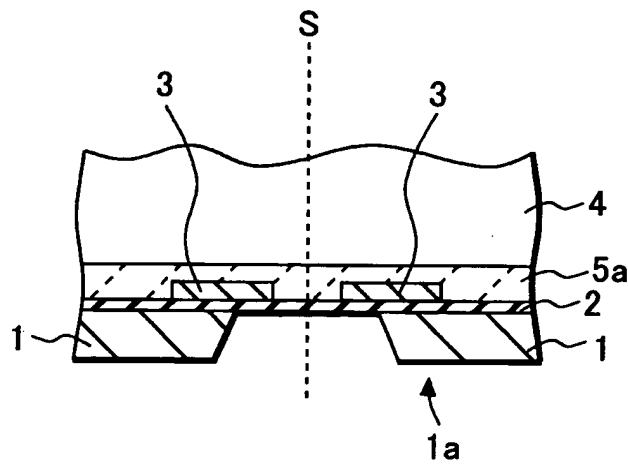

BEST AVAILABLE COPY

2/11


**FIG.3**

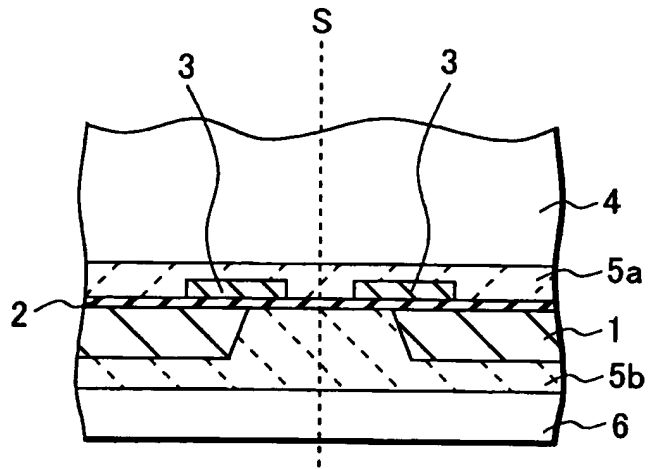


BEST AVAILABLE COPY

3/11

**FIG.4A**

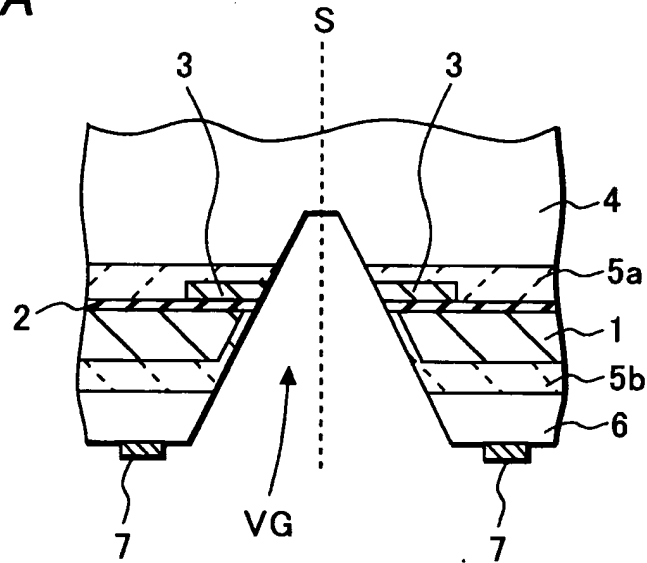

**FIG.4B**

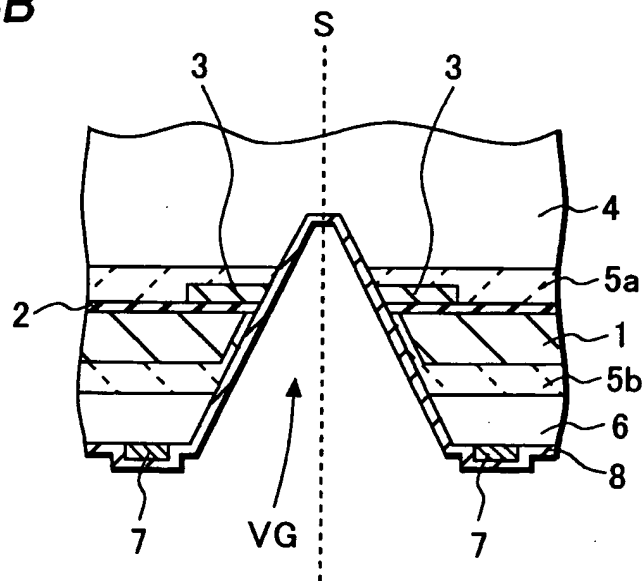


BEST AVAILABLE COPY




5/11

**FIG.6A**

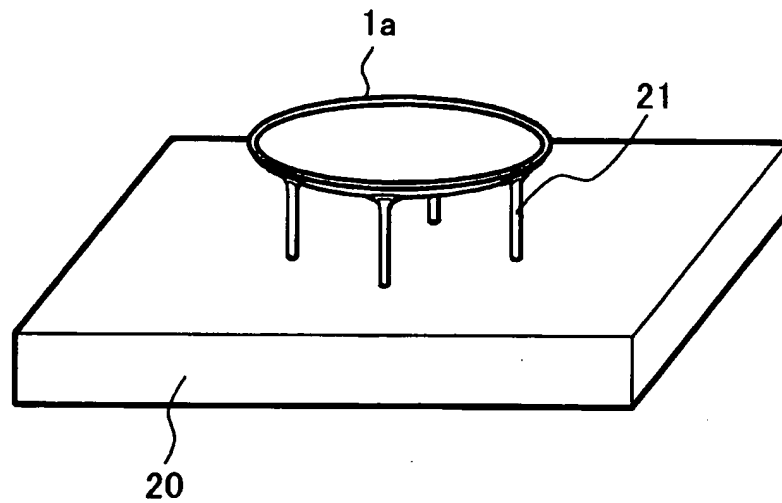

**FIG.6B**

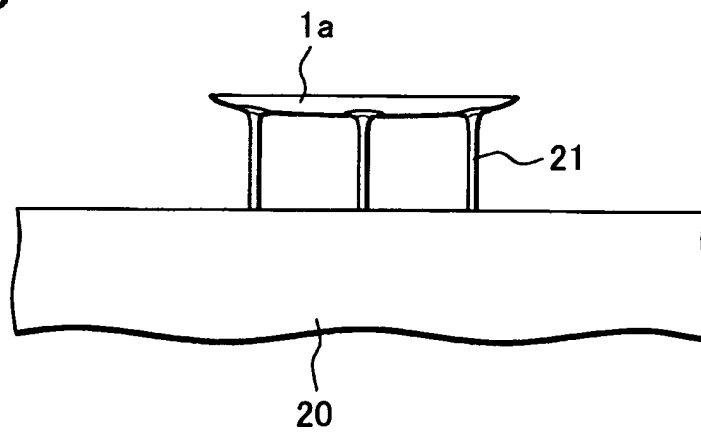

BEST AVAILABLE COPY


**FIG. 7A**

FIG. 7A is a side cross-sectional view of a device 30. The device includes a main body 31 with two circular end components 32. An arrow X points to the right, indicating a direction of movement or force. The top surface of the main body 31 features a series of rectangular blocks 46, with two of them labeled 45. Above these blocks is a layer 40, which is divided into two sections 41 and 42 by a dashed vertical line. A component 1a is mounted on the top surface of the main body 31, and a component 21 is mounted on the side of the main body 31. A component 20 is also shown on the side of the main body 31. The entire assembly is supported by a base 30.


**BEST AVAILABLE COPY**

7/11

**FIG.8**

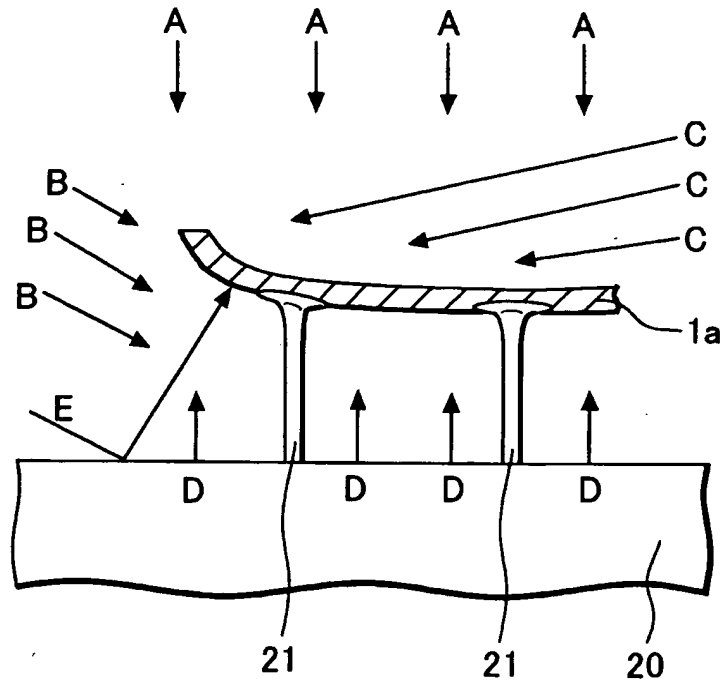


**FIG.9**

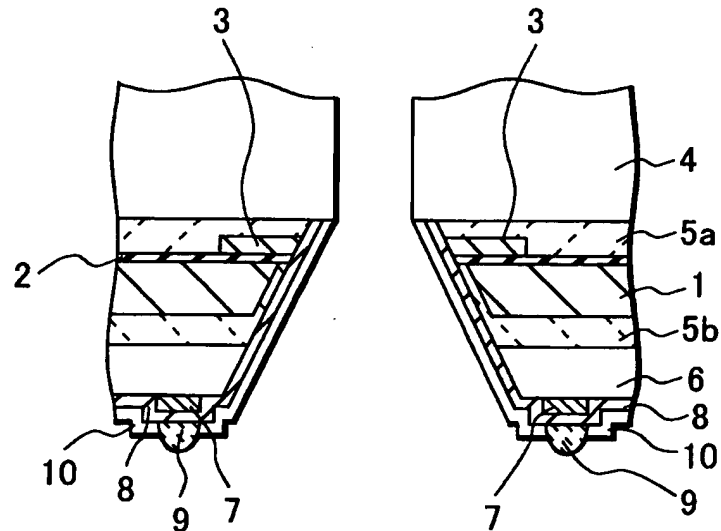


BEST AVAILABLE COPY

8/11

**FIG.10A** PRIOR ART

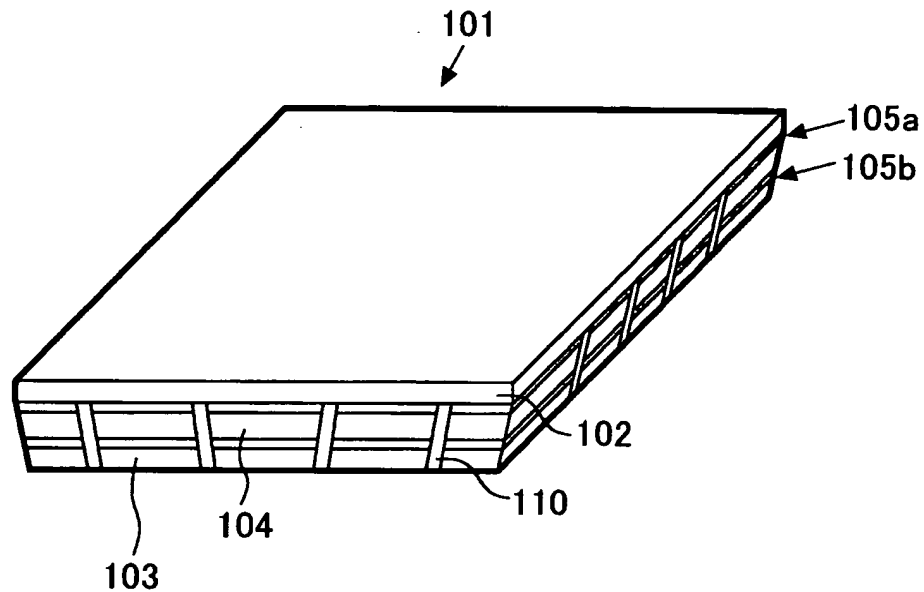


**FIG.10B** PRIOR ART

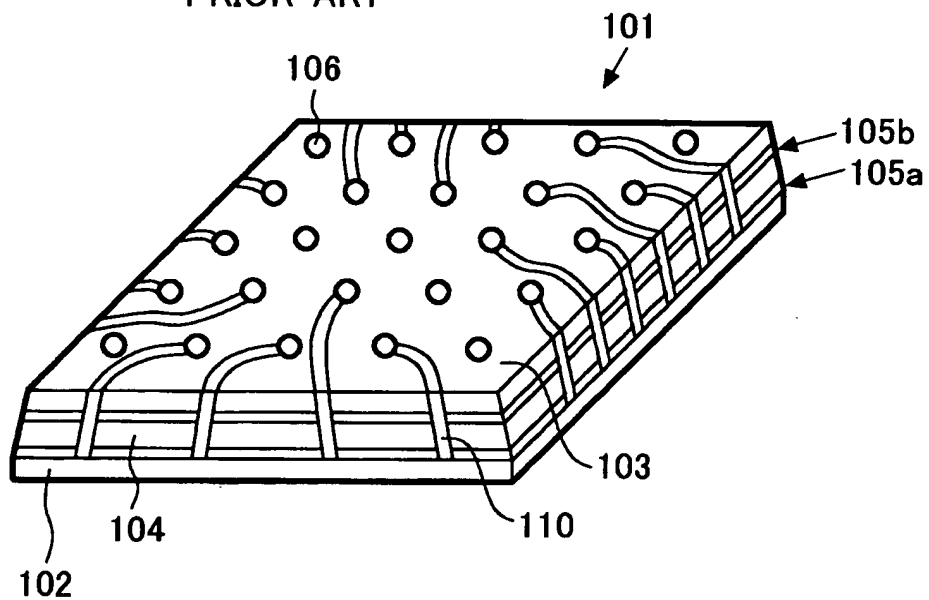

BEST AVAILABLE COPY

9/11


**FIG.11** PRIOR ART

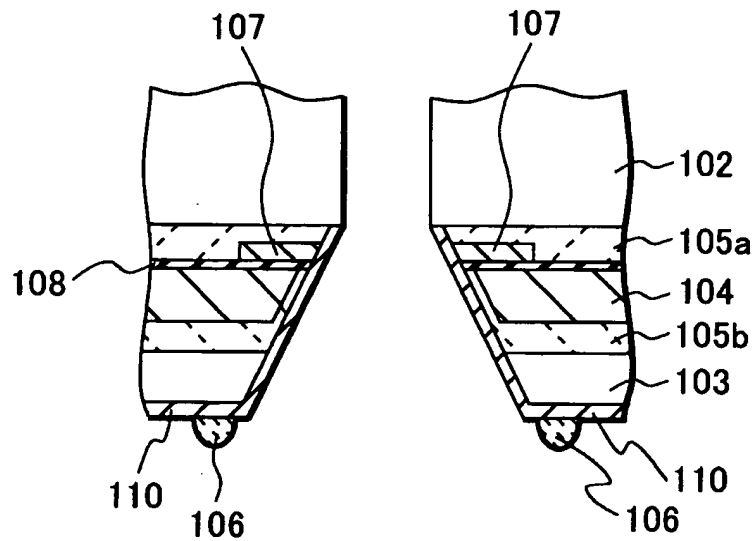


BEST AVAILABLE COPY

10/11

**FIG.12A** PRIOR ART

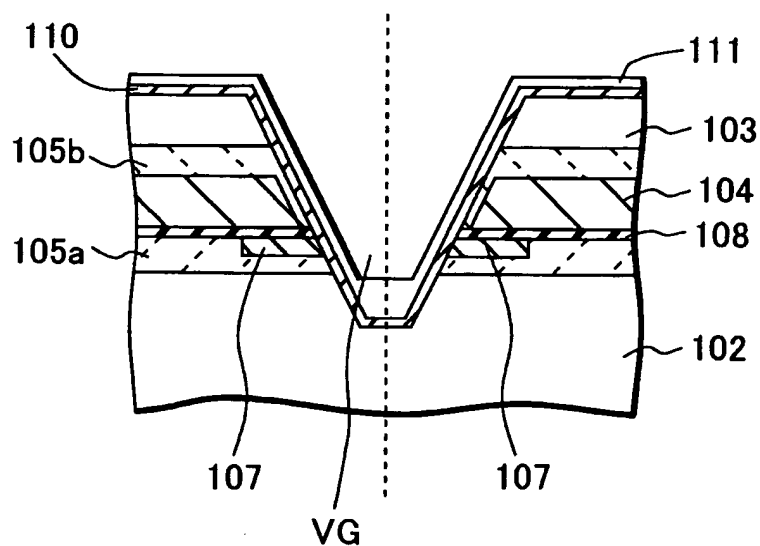

**FIG.12B** PRIOR ART

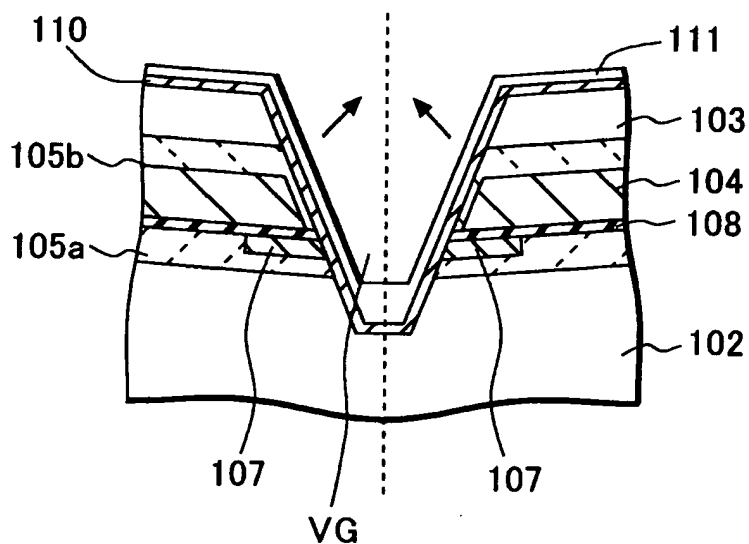


BEST AVAILABLE COPY

11/11


**FIG.13**

PRIOR ART

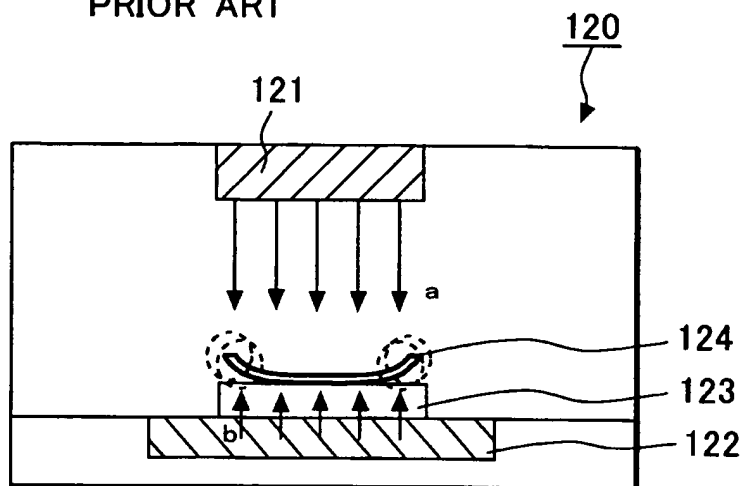

**FIG.14**

PRIOR ART

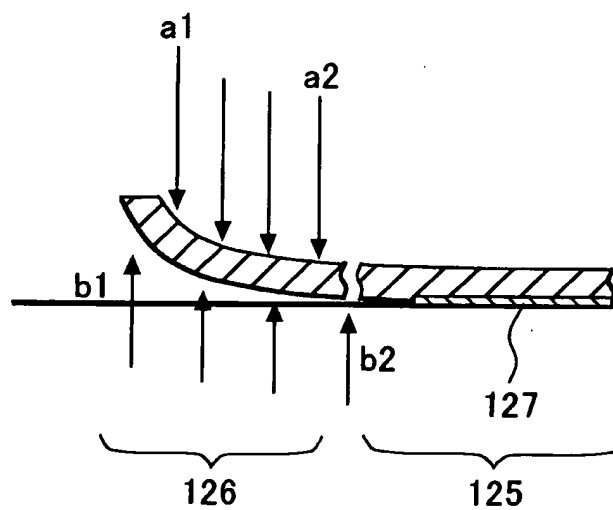

BEST AVAILABLE COPY